


# LC | Pull Uniboot Connectors

COMPACT DESIGN FOR HD PANELS • REINFORCED BOOT

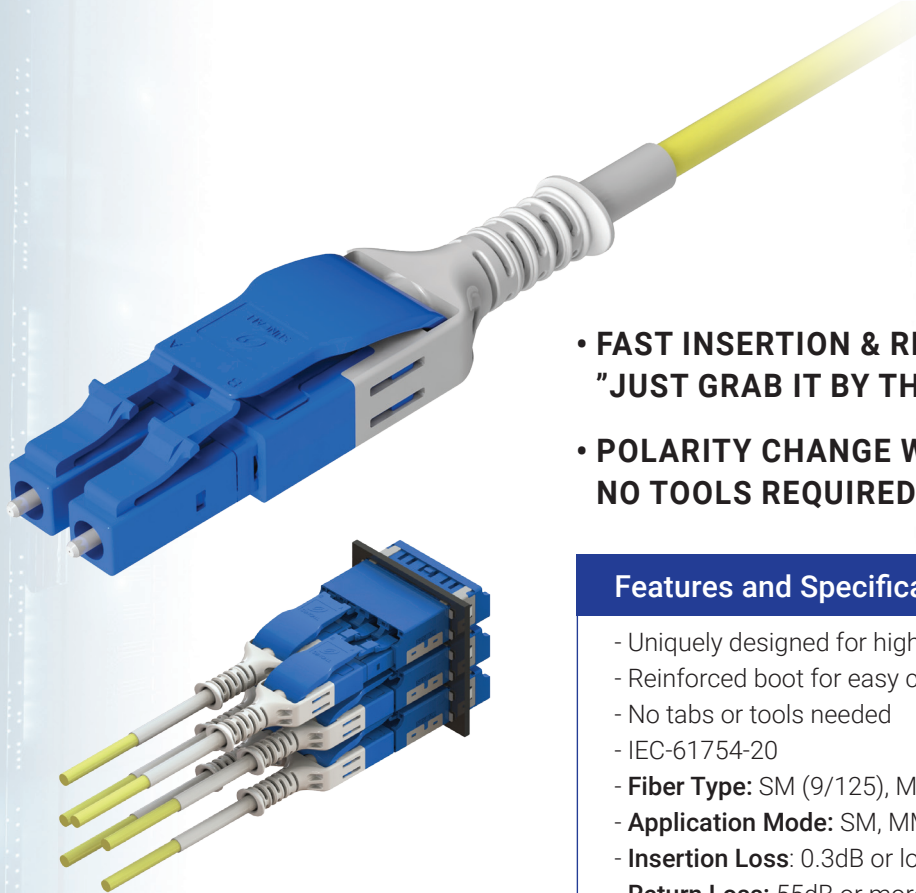


- **FAST INSERTION & REMOVAL**  
"JUST GRAB IT BY THE BOOT"
- **POLARITY CHANGE WITHOUT EXPOSING FIBER, NO TOOLS REQUIRED**


### Features and Specifications

- Uniquely designed for high-density packaging
- Reinforced boot for easy connect & disconnect
- No tabs or tools needed
- IEC-61754-20
- **Fiber Type:** SM (9/125), MM (50/125, 62.5/125)
- **Application Mode:** SM, MM, APC
- **Insertion Loss:** 0.3dB or lower
- **Return Loss:** 55dB or more UPC, 65dB or more APC


### NEW POLARITY CHANGE PROCESS

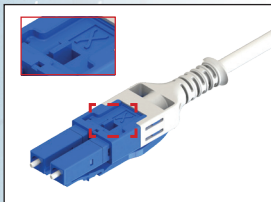


**Step 1:** CLICK to unlock bottom latch with finger

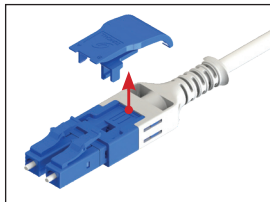


**Step 2:** Extract the latch from Uniboot

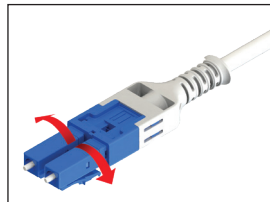

**Step 3:** Rotate plugs outward 180°

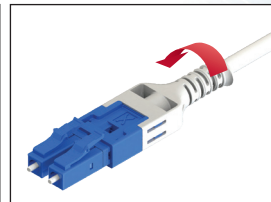

**Step 4:** Rotate connector body 180°

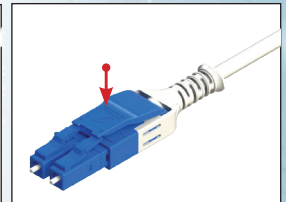

**Step 5:** Replace latch, then lock in place

Available in a Variety Colors:



UL94V-0



Scan the code for more details