


# MPO | 16F Pull Boot Connectors

DESIGNED FOR HD PACKAGING • OFF-CENTER KEY POSITION

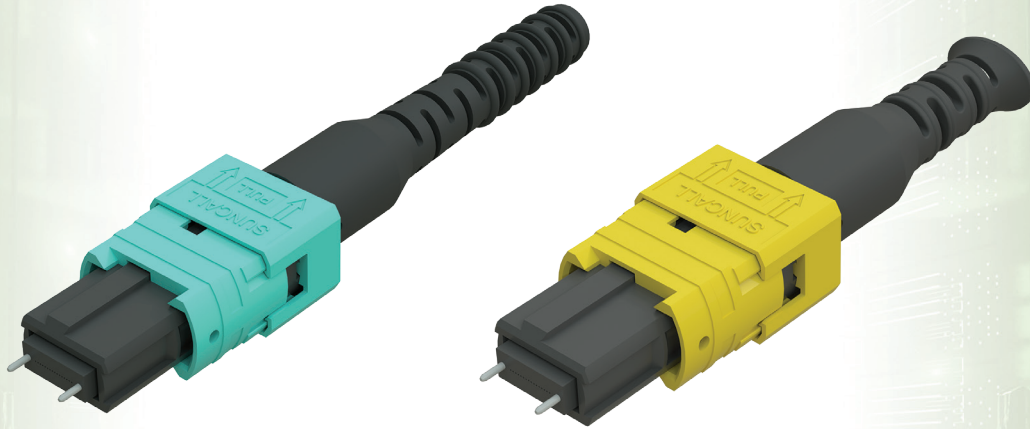

- 16F STANDARD OFF-CENTER KEY POSITION
- 2 BOOT OPTIONS AVAILABLE

### Features:

- Designed with industry standard off-center key position
- Created for high-density packaging
- Offered in 3.0mm
- Boot options: Pull-Regular, Pull-Short
- Available in a variety of housing colors

Housing Color Variety:



	SM STANDARD	SM LOW LOSS	MM STANDARD	MM LOW LOSS
Insertion Loss	0.70dB Max	0.35dB Max	0.50dB Max	0.35dB Max
Return Loss	60dB(8°Polish)		20dB(Flat Polish)	
Operating Temperature	-40 to +75°C			
Housing Color	Green	Yellow	Beige/Black	Aqua/Heather Violet
Fiber Type	OS1/OS2	OS1/OS2	OM1/OM2	OM3/OM4/OM4+



UL94V-0



Scan the code  
for more details