

SUNCALL AMERICA INC

LC | Pull Uniboot Connectors

COMPACT DESIGN FOR HD PANELS • REINFORCED BOOT

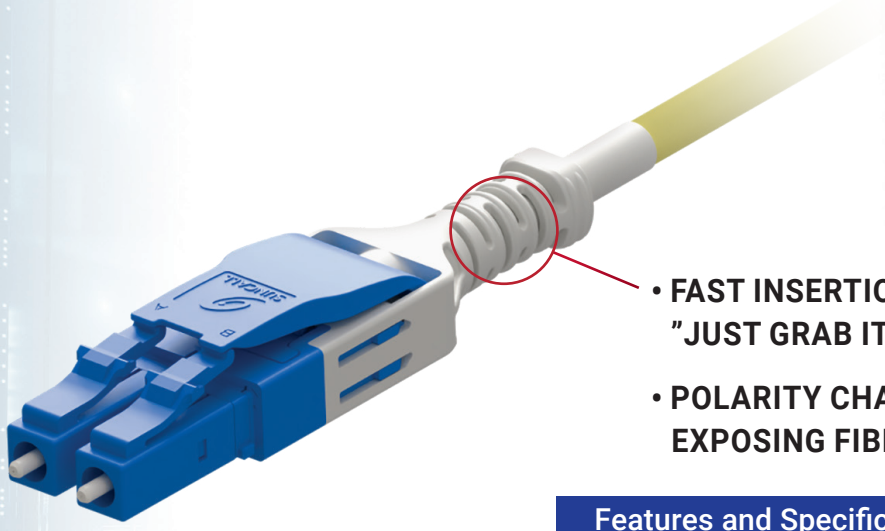


- **FAST INSERTION & REMOVAL "JUST GRAB IT BY THE BOOT"**
- **POLARITY CHANGE WITHOUT EXPOSING FIBER, NO TOOLS REQUIRED**

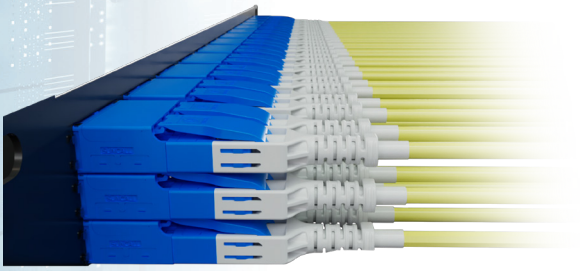

Features and Specifications

- Uniquely designed for high-density packaging
- Reinforced pull boot for easy connect & disconnect
- No tabs or tools needed
- Available in 1.6mm, 2.0mm and 3.0mm cable sizes
- IEC-61754-20
- **Fiber Type:** SM (9/125), MM (50/125, 62.5/125)
- **Application Mode:** SM, MM, APC
- **Insertion Loss**: 0.3dB or lower
- **Return Loss:** 55dB or more UPC, 65dB or more APC

NEW POLARITY CHANGE PROCESS

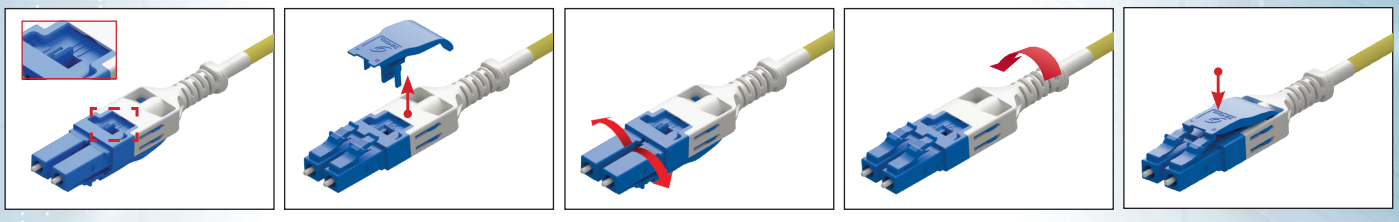

Step 1: CLICK to unlock bottom latch with finger

Step 2: Extract the latch from Uniboot

Step 3: Rotate plugs outward 180˚

Step 4: Rotate connector body 180˚

Step 5: Replace latch, then lock in place

Available in a Variety of Colors:

Easy Polarity Switching

GR-326 CORE

REACH

RoHS

UL94V-0

Scan the code for more details

© 2024 Suncall America, Inc. All rights reserved.

www.SuncallAmerica.com • 469.445.1131 or 864.329.1130 • sales@suncallamerica.com